




AIR FORCE ONE® COMPACT CYLINDER



FEATURES

- Oil impregnated sintered bronze rod bushing
- Available with magnetic pistons
- 303 stainless steel ground, polished and roller burnished piston rods
- Double acting, spring return, spring extend & double rod cylinders
- 304 stainless steel tube
- Temperature range: 30 to 180° F
- Anodized aluminum heads
- Air pressure rating to 250 psig

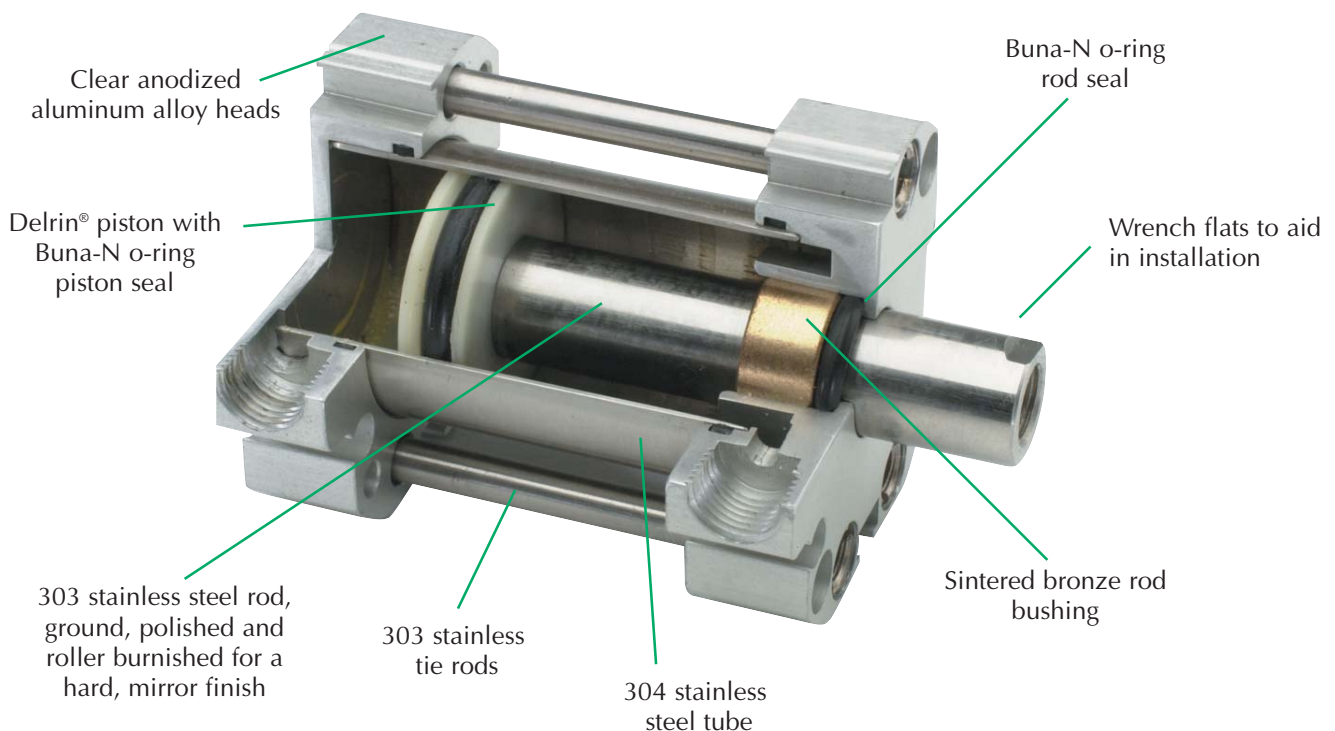

Delrin® is a registered trademark of E.I. DuPont Co.

NUMBERING SYSTEM

A	F	-				-		-		-	
Air Force One® Compact Cylinder			Rod Type			Bore			Options		
Mounting Type			Cylinder Type			Stroke					
B - Bottom Mount F - Front Mount R - Rear Mount U - Universal T - Thread			D - Double Acting S - Single Acting (Spring Return) R - Reverse Acting (Spring Extend)			10 - 5/8" 12 - 3/4" 17 - 1 1/16" 24 - 1 1/2" 32 - 2" 40 - 2 1/2"			Blank - No Options V - Viton Seals M - Magnetic Piston T - Threaded Rod		
						in 1/8" increments					